



Headworn Microphone User Guide

MU-13 Series



MU-23 Series




MU-210 Series




I. Parts Name


1. MU-13 Series:

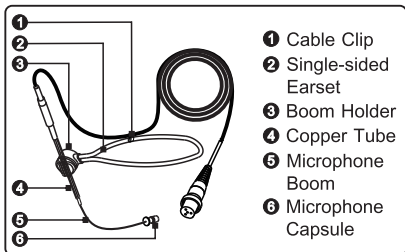



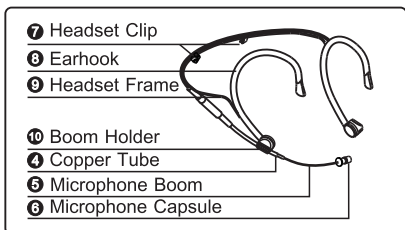


2. MU-23 Series:

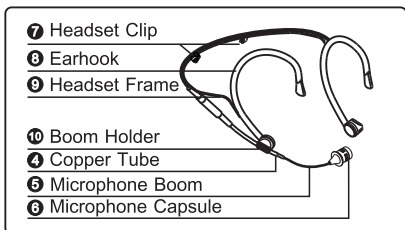

3. MU-210 Series:



Connector Options :

-  3.5mm mono phone jack plug
-  4 pin connector
-  Mini XLR connector
-  TA4F
-  3.5mm screw-lock plug


II. Assembly Illustrations

1. MU-13 Series:


- (A) Select a suitable size of single-sided earset **2**. Attach the copper tube **4** into the microphone boom holder **3**.




- (B) Clip the cable and earset **2** together with the cable clip **1**.



- (C) Widen and adjust the earset proportional to fit the user's ear.




- (D) Bent inward to form an appropriate curvature.



2. MU-23 Series/MU-210 Series:

- (A) Select a suitable headset frame size. Attach the copper tube ④ into the microphone boom holder ⑩.
- (B) Insert the cable by clipping into the headset clip ⑦.



III. Wearing MU-13 Series Earset Microphone

Place the earset over your ear. Press against your earlobe and reshaped it for a comfortable and snug feel.



IV. Adjusting Headworn Microphones


1. MU-13 Series:

For the ideal location, position the microphone boom ⑤ so the microphone is about 1 cm from the corner of your mouth.



2. MU-23 Series/MU-210 Series:


For the ideal location, position the microphone boom ⑤ so the microphone is about 1 cm from the corner of your mouth.




3. Caution: For distance and angle adjustment, only adjust the microphone boom ⑤. Don't bend the copper tube ④.

V. Wiring Illustrations

(2-Wire)



(3-Wire)



VI. How to Obtain Ideal Sound Quality When Wearing Headworn Microphone?

1. Position the microphone and boom so that the microphone is about 1.0 ~ 1.5 cm (0.4 ~ 0.6-inch) from the right or left corner of your mouth to minimize breath or “popping” noise.
2. Omni-directional and Uni-directional types are available. The ideal way to wear the “Omni” type is to have a microphone capsule closer to the corner of the mouth with about 1.0 ~ 1.5 cm away (see Fig. 1 and 2) to minimize breathing or “popping” noise for ideal sound quality. (See Fig. 3).




Fig. 1



Fig. 2



Fig. 3



Fig. 4

3. "Uni" type is directional. During a live performance, it has stronger bass sound and higher dynamic range, better suited for "music" effect. However, the ideal wearing position for Uni is more complicated than Omni. Apart from the sensitivity level changes due to distances away from the mouth, it is more susceptible to the Proximity effect and popping noise. In theory, it is recommended to position a unidirectional capsule in front of the mouth for ideal sound quality. However, this position is vulnerable to the problems of popping noise and affects both types of capsules. In reality, the ideal wearing position for sound quality refers to Fig. 4 (about a 45-degree angle and 1.0 ~ 1.5 cm distance away from the edge of mouth).
4. An amplified system is recommended during soundcheck for adjusting the ideal microphone position.
5. Note: Refer to the actual product in the event of product description discrepancy.
6. Spraying alcohol directly onto the condenser capsule module will cause severe damage and invalidate the warranty.

Disposal



2005-08-13

Dispose of any unusable devices or batteries responsibly and in accordance with any applicable regulations.

Disposing of used batteries with domestic waste is to be avoided!

Batteries / NiCad cells often contain heavy metals such as cadmium(Cd), mercury(Hg) and lead(Pb) that makes them unsuitable for disposal with domestic waste. You may return spent batteries/ accumulators free of charge to recycling centres or anywhere else batteries/accumulators are sold.

By doing so, you contribute to the conservation of our environment!

FCC

THIS DEVICE COMPLIES WITH PART 74 OF THE FCC RULES.
OPERATION IS SUBJECT TO THE FOLLOWING TWO
CONDITIONS:

- (1) This device may not cause interference.
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment.

IC

This device complies with Industry Canada RSS-123 ISSUE 2 standards. Operation is subject to the following two conditions:

- (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

- (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

MIPRO[®]
MICROPHONE PROFESSIONALS



MIPRO Electronics Co., Ltd

Headquarters: No. 814, Beigang Rd., Chiayi City 600079, Taiwan
Tel : +886.5.238.0809 Fax : +886.5.238.0803
www.mipro.com.tw mipro@mipro.com.tw



2CE362E

All rights reserved. Do not copy or forward without prior approvals of MIPRO. Specifications and design subject to change without notice. YM 023/05